


Ultra[®] 2800 Dispensing System



Electronic pdf files of EFD manuals are also available at www.efd-inc.com/manuals.html

Size: 18.4 x 8.1 x 32.3 cm (7.25 w x 3.18 h x 12.73 d")
 Cable assembly: 1.8 m (6 feet length to end of handset)
 Voltage: 100-240 VAC
 Meets or exceeds CE standards
 Warranty: 2 years

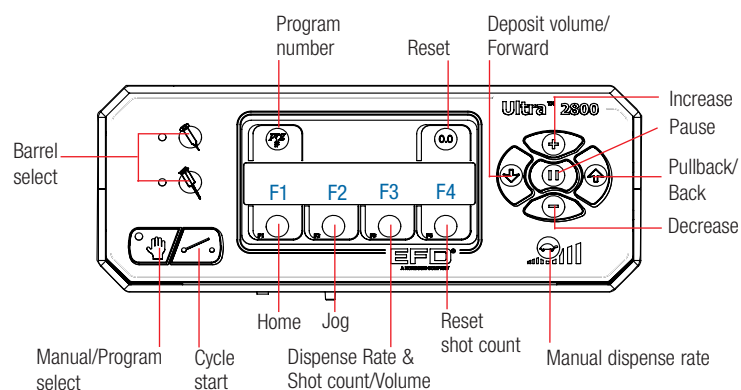

The 2800 Dispensing System brings positive displacement technology to applications that require precise metering of assembly fluids that change viscosity or where a specific flow rate is necessary.

Unique patented technology within the system uses a flexible drive cable driven by a powerful stepper motor, to apply consistent dots or beads of virtually any assembly fluid. The heavy-duty motor is contained within the benchtop controller, keeping the handheld reservoir system lightweight and easy to use.

For setup, the operator can use a menu-driven touch pad to set deposit volume (as small as 0.1 microliter), flow rate and other specific criteria. After initial setup, there is no need to recalibrate or reset the system due to changes in fluid viscosity or reservoir volume.

Key Features

- Highly repeatable, precise fluid control
- No need to recalibrate during operation
- All electric; does not require shop air
- Programmable pullback eliminates drooling
- All digital, multi-function display with readouts of deposit volume, rate, shot count, and more
- 100 user-defined memory cells that store shot volume, syringe barrel size, pullback, dispense rate, and pause

Models

- | | |
|---------------------------------------|---|
| 2800-3 For 3cc syringe barrels | 2800-10 For 10cc syringe barrels |
| 2800-5 For 5cc syringe barrels | 2800-30 For 30cc syringe barrels |

Ultra 2800 positive displacement systems include everything needed for immediate production

Ultra 2800 dispenser with power cord	✓
Omnidirectional foot pedal	✓
Cabinet-mounted barrel holder	✓
Cabinet-mounted cable guide	✓
(2) boxes of syringe barrels and red pistons	✓
(2) boxes of tip caps	✓
Quick Start Guide	✓
User's Guide	✓
EFD test material	✓
Settings Grid	✓
Barrel Attachment Guide	✓
Specify the following at time of purchase: (2) boxes of dispense tips (tapered recommended)	✓
Ergonomic hand grip, #2441 (for 2800-30 only)	○
Safety splash shield, #2436*	○
1.7 x magnifying lens, #2442*	○
Syringe barrel production stand, #2856	○

✓ = included ○ = optional

*Order accessory mounts separately, #2800AM



Request a free 30-day evaluation.

Try the new Ultra 2800 Dispensing System and see the results for yourself. It's free for 30 days — with absolutely no obligation to buy. Call EFD at **800-556-3484** for details, or request an evaluation unit at www.efd-inc.com/eval.

Ultra Advanced Component System



All EFD Ultra dispensers and disposable components (syringe barrels, pistons and dispensing tips) are designed to work together as complete systems.

When you combine high-quality Ultra components with an Ultra dispenser, you produce the most accurate, consistent fluid deposits possible.

- Industrial grade syringe barrels and SmoothFlow™ pistons provide a close-tolerance fit for controlled, drip-free fluid application.
- Precision molded tips are available in a wide variety of styles, sizes and lengths to match any dispensing application.
- All Ultra components are manufactured in EFD's own silicone-free US facilities, and are certified safe for industrial use.



For helpful recommendations, please contact a Fluid Application Specialist. For free samples, go to www.efd-inc.com/samples.

EFD®
A NORDSON COMPANY

For EFD sales and service in over 30 countries, contact EFD or go to www.efd-inc.com/contact

EFD, Inc.

East Providence, RI USA
800-556-3484; +1-401-434-1680 (outside the USA)
info@efd-inc.com www.efd-inc.com

EFD International Inc.

Dunstable, Bedfordshire, UK
0800 585733 or +44 (0) 1582 666334
Ireland 00800 8272 9444
europe@efd-inc.com www.efd-inc.com

EFD, Inc., Asia

China: +86 (21) 5854 2345
china@efd-inc.com www.efd-inc.com/cn
Singapore: +65 6896 9630 sin-mal@efd-inc.com