

Clog-free, precise 781S MicroMark[®] spray system.

marking inks
paints

EFD[®]
A NORDSON COMPANY



Electronic pdf files of EFD manuals are also available at www.efd-inc.com/manuals.html

"The MicroMark is a virtually maintenance-free ink marking system that is easy to adjust. It is the standard marking system on every new balancing machine we produce."

Schenck Turner Inc.

Unique MM781-SYS MicroMark spray marking system produces round patterns and stripes from 5.0 mm to 30.4 mm (0.20" to 1.20") wide without overspray.

Programmable nozzle air delay after each spray cycle keeps the spray nozzle clog-free and reduces maintenance and downtime.

Compact marking system can be used to color-code similar components, indicate pass/fail, or show production or test status. It can be activated manually, or interfaced with other systems to mark at scheduled intervals or whenever a signal is received.




Features

- No clogging, dripping or drying out
- No missed shots
- **Consistent size and placement**
- Cycle rate exceeds 400/minute
- No mist or overspray
- Low-maintenance design

MicroMark spray marking system

The complete MM781-SS system includes the 781S-28 dispense valve, ValveMate™ 8040 controller, and the 615DTL fluid reservoir.

Expert technical assistance and high quality standards ensure productive, trouble-free performance. EFD offers a full line of reliable dispensing systems to meet your specific application requirements.

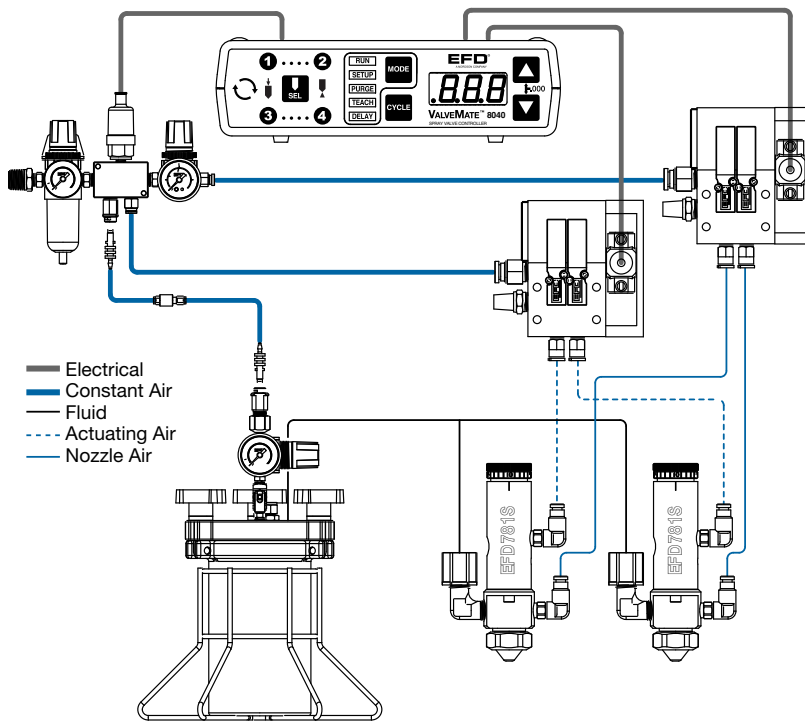

MicroMark Controller

Valve open time is the primary control of deposit size. The MicroMark controller adjusts valve open time and nozzle pressure. It puts push-button adjustment of valve open time where it needs to be — near the valve.

- Multi-valve control- up to (2) spray valves
- Partner to Programmable Logic Controller (PLC)
- Easy deposit size control
- Precise control of nozzle air pressure
- Nozzle air delay for clog-free operation
- Increased production output
- End user convenience
- Maximum machine efficiency

Optional: XYZ Dispensing System

The EFD Ultra® TT xyz dispensing system incorporates all functions of the controller. Compact 3-axis tabletop spray system offers coverage deposit repeatability. Work area: 325 x 325 x 100 mm or 525 x 525 x 100 mm.


MicroMark 781S Valve

The precision spray valve features a nozzle with 0.7 mm (0.028") orifice and adjustable needle stroke for applying marks 5.0 mm to 30.4 mm (0.20" to 1.20") in diameter.

Adjustable Low Volume Low Pressure (LVLP) nozzle air transfers fluid from the nozzle to the part at low velocity and higher transfer efficiency.

- Size:** 104.6 mm x 26.9 mm diameter (4.12" x 1.06")
- Weight:** 235.3 grams (8.29 oz)
- Actuating air pressure required:** 70 to 90 psi (4.8 to 6.2 bar)
- Maximum input fluid pressure:** 300 psi (20.7 bar)
- Fluid inlet thread:** 1/8 NPT female
- Mounting:** (1) 1/4-28 UNF tapped hole or adjustable mounting block
- Cycle rate:** Exceeds 400 per minute
- Air cylinder body:** Hard-coated aluminum
- Fluid body:** Hard-coated aluminum
- Air cap:** Type 303 stainless steel
- Piston:** Type 303 stainless steel
- Needle and nozzle:** Type 303 stainless steel
- Needle packings:** Teflon®

All stainless steel valve parts are passivated.

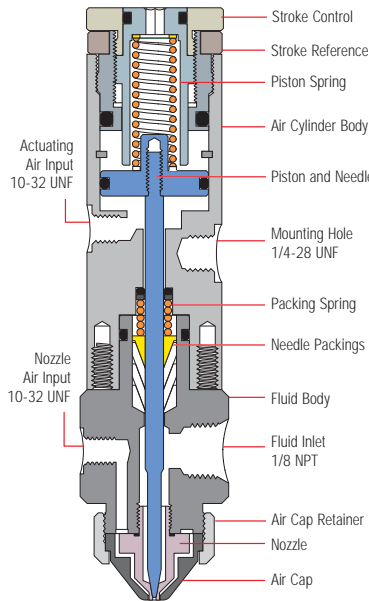

MicroMark 781S
75% actual size

Fluid Reservoirs

The MicroMark system includes a 1.0 liter tank reservoir and one polyethylene liner.

The tank features full cover removal for easy liner replacement or to place a bottle into this top-ported tank. A 15 psi (1.0 bar) precision tank regulator ensures constant fluid pressure to the spray valve.

Options: 5.0 liter tanks and cartridge reservoirs can be specified. Cartridge sizes range from 2.5 to 32 ounces (75cc to 950cc).



For EFD sales and service in over 30 countries, contact EFD or go to www.efd-inc.com/contact

EFD, Inc.

East Providence, RI USA
USA & Canada: 800-556-3484; +1-401-434-1680
info@efd-inc.com www.efd-inc.com

EFD International Inc.

Dunstable, Bedfordshire, UK
0800 585733 or +44 (0) 1582 666334
Ireland 00800 8272 9444
europe@efd-inc.com www.efd-inc.com

EFD, Inc., Asia

China: +86 (21) 5854 2345
china@efd-inc.com www.efd-inc.com/cn
Singapore: +65 6896 9630 sin-mal@efd-inc.com

Spray Area Coverage

model #	nozzle diameter	pattern	Nozzle distance from surface			
			25.4 mm (1")	50.8 mm (2")	76.2 mm (3")	152.4 mm (6")
781S-28	0.7 mm (0.028")	round	5.0 mm (0.20")	10.1 mm (0.40")	15.2 mm (0.60")	30.4 mm (1.20")